

Design and production of fine quality
laser cut models and components



Wooden Handcart

Instructions

To assemble this kit you will require a good quality PVA adhesive and a craft knife or scalpel for cutting tabs on some parts. You may also find the aid of a pair of tweezers useful.


NOTE: If you intend to paint the model you may wish to consider painting the parts while they are still attached to the card. Try not to oversaturate the material as this can cause distortion. We used paint from the Vallejo "Old & New wood effects" set to achieve our painted example.

Surface primer: 70.614 / 71.075 / Wash fix 74.517

These are of an ideal consistency but the wash fix should be used sparingly.


1

To release the parts use a thin sharp blade and cleanly slice through the tabs shown.

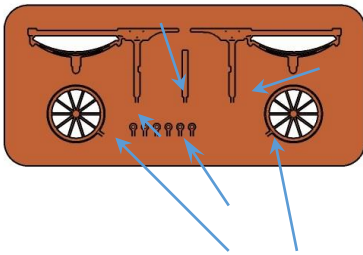


2

Using a small amount of adhesive fix the rear of the wheels to the outside of the frames and suspension as shown.

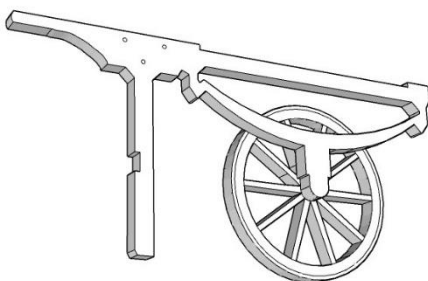


3

Release the cart top frame by cutting the tabs marked.




4

When the wheel and frame assembly are bonded, lay out the top frame and fix as shown noting the top side of the frame has relief engraving and the fixing side is flush.

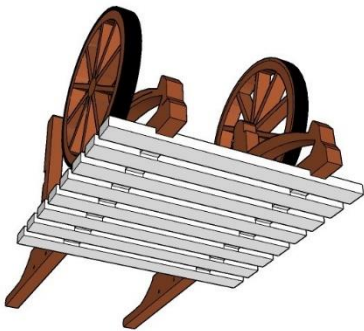


5

Release the cross support bar as with previous parts and fix as shown.

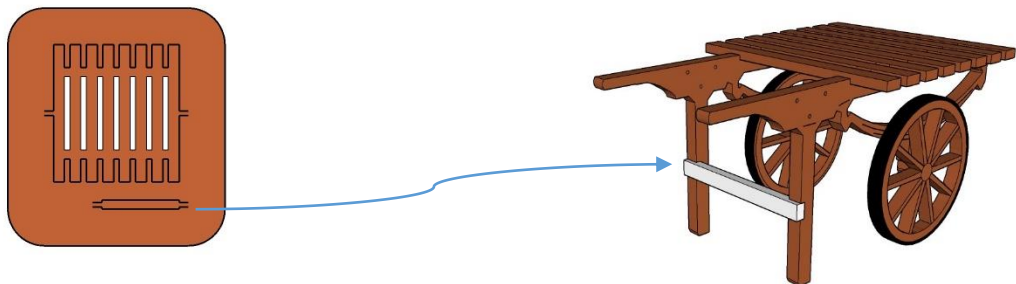

6


Release and fix the axle as shown.

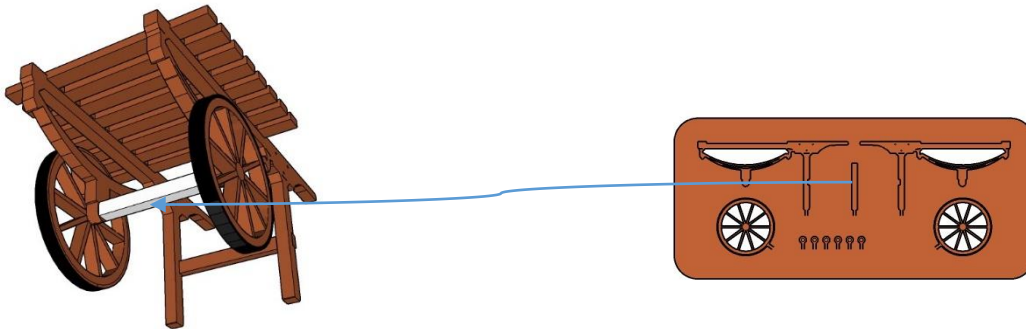

TIP: Apply adhesive to both ends of the axle and roughly position it as shown. Apply gentle pressure with forefinger and thumb either side of the wheels to grip the axle and manipulate in its final position with tweezers.

7

Finally, release and fix the wheel hub detail.

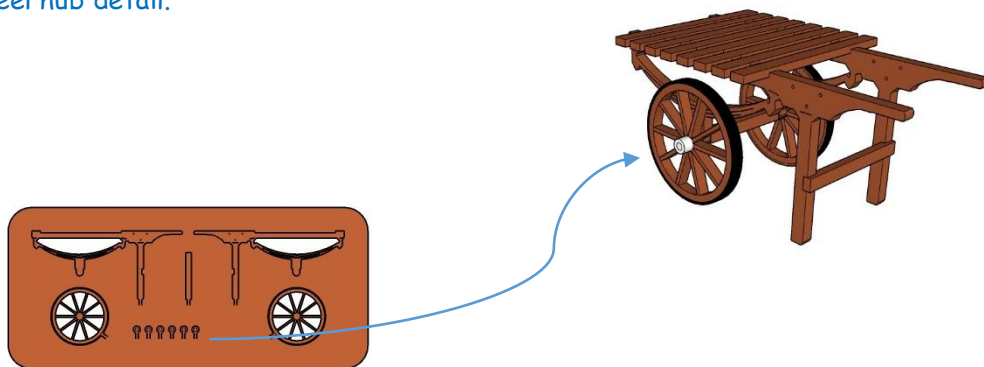

This detail is minute and each kit includes four more than is required as they are easily lost.

Enjoy your model!